MOBEL LINEA

D-8.3.7

metálica

Specs guide



METÁLICA

CABINETS AND SHELVES

PEDESTALS

CREDENZAS



SPECIFICATIONS

- PRODUCT OVERVIEW
- ASSEMBLED STRUCTURE
- DISASSEMBLED STRUCTURE
- TAMBOUR DOORS
- MELAMINE HINGED DOORS
- FILES
- WARDROBE - ASSEMBLED STRUCTURE
- WARDROBE - DISASSEMBLED STRUCTURE
- WARDROBE - TAMBOUR DOORS
- WARDROBE - MELAMINE HINGED DOORS

COMPLEMENTS


- SHELVES
- MULTI-TOP
- TELESCOPIC FILES

DOCUMENTATION


- MEASUREMENTS
- VERSIONS
- CERTIFICATES AND CARE INSTRUCTIONS
- ECODESIGN

PRODUCT OVERVIEW


Assembled cabinets




Tambour doors




Cabinet (without doors)




Melamine hinged doors




Files



Shelves + low melamine doors




Shelves + Files




Wardrobe


Disassembled cabinets



Tambour doors




Wardrobe with tambour doors



Wardrobe with melamine hinged doors

ASSEMBLED STRUCTURE

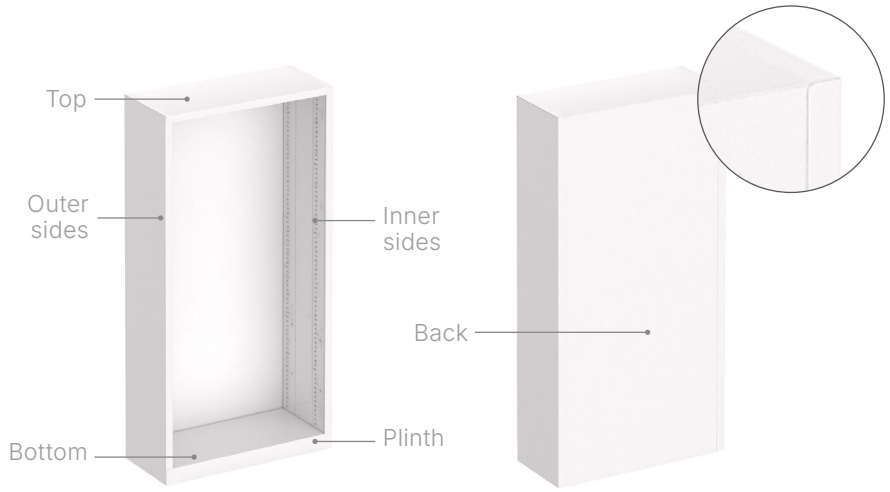

Made of cold-rolled steel sheet of 0,8 and 1,2 mm thick and quality DC01.

Finishes

White RAL9016

Sand

Grey RAL 7035

Silver RAL 9006

Graphite RAL 7022


Black RAL 9005

All the elements are joined by resistance welding.

ASSEMBLED STRUCTURE

Top

A4 folders can be hung on its lower folds.

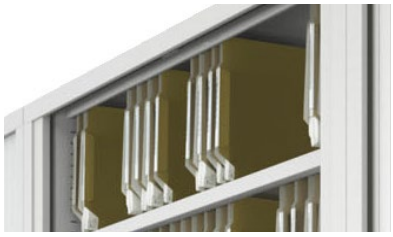

Bottom

Features two metal reinforcements that serve as supports for the levelers.

Includes 4 levelers made of steel and polyamide to ensure better floor stability.

Maximum adjustment: 1 cm.



Removable inner sides


Fastened by fittings and DIN 7981 screws.

They are drilled with a holes pattern spaced every 25 mm to position the shelves at the desired height.



This unit is delivered **assembled.**

DISASSEMBLED STRUCTURE

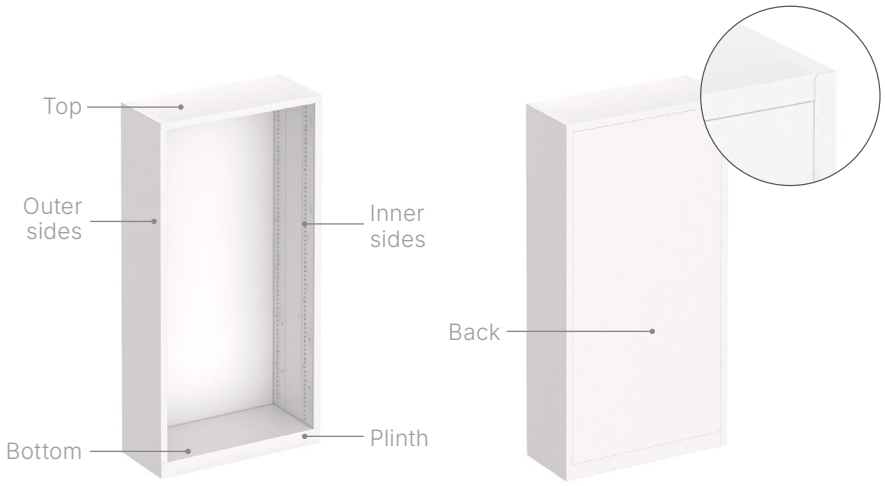

Made of cold-rolled steel sheet of 0,8 and 1,2 mm thick and quality DC01.

Finishes

White RAL9016

Sand

Grey RAL 7035

Silver RAL 9006

Graphite RAL 7022


Black RAL 9005

All the elements are joined using sheet-metal screws DIN 7982.

DISASSEMBLED STRUCTURE

Top

A4 folders can be hung on its lower folds.

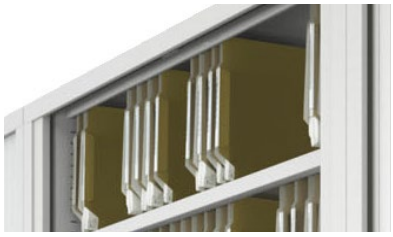

Bottom

Features two metal reinforcements that serve as supports for the levelers.

Includes 4 levelers made of steel and polyamide to ensure better floor stability.

Maximum adjustment: 1 cm.




Removable inner sides

Fastened by fittings and DIN 7981 screws.

They are drilled with a holes pattern spaced every 25 mm to position the shelves at the desired height.



PUERTAS PERSIANA



Made of PVC slats (trilaminate), fire-retardant class M1 - (EN 13501-1, B-s1,d0).

Finishes

White
Sand
Grey
Silver
Graphite
Black
Beech
Maple
Light acacia
Dark acacia
Oak
Dark oak
Carbon oak

Opening system

The top and bottom include silver poliamide (PA66) guides on which the slats slide.

Lock type

Hook latch lock.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



TAMBOUR DOORS

Handle types

BASIC

The first slat is an aluminum metal profile.

It is supplied with the same finish as the structure.



PLUS

The first slat is an aluminum profile covered with a PVC trim featuring a magnetic closure.

It is supplied with the same finish as the tambour doors.



The handle is a PVC trim embedded in the first slat (profile) of each door.

White RAL9016


Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005

HINGED DOORS



19 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 ± 5 Kg/m³.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

Finishes

White

Sand

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

Hinges

110º hinges with 91° opening and silicone soft bumpers.



HINGED DOORS

Lock type

Standard **latch hook** locking system with white zinc-coated internal rods.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



Handles types

Standard: Made of aluminum painted with epoxy paint.

It is assembled to the door using M4 screws.

Dimensions: 11,5 × 2 × 3 cm



Optional: Made of aluminum painted with epoxy paint. It is assembled to the door using M4 screws.

Dimensions: 11,2 × 2,6 × 0,7 cm



White RAL9016

Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005

FILES



Fronts

19 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 ± 5 Kg/m³.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

White

Sand

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

Frame and telescopic rails

Metal frame made of 1,5 mm thick steel sheet and finished with black epoxy paint.

The telescopic rails are full-extension with steel ball bearings **supporting up to 40 kg** and include **an anti-tilt system.**

Melamine fronts are fixed to the metal frame using M6 × 10 screws.



FILES

Lock type

Horizontal latch hook with simultaneous locking system on all files, with white zinc-coated internal rods.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



Handles types

Standard: Made of aluminum painted with epoxy paint.

It is assembled to the door using M4 screws.

Dimensions: 11,5 × 2 × 3 cm



Optional: Made of aluminum painted with epoxy paint. It is assembled to the door using M4 screws.

Dimensions: 11,2 × 2,6 × 0,7 cm



White RAL9016

Sand


Silver RAL 9006

Graphite RAL 7022


Black RAL 9005

FILES

Files distribution

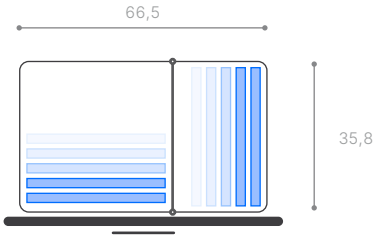


800 mm

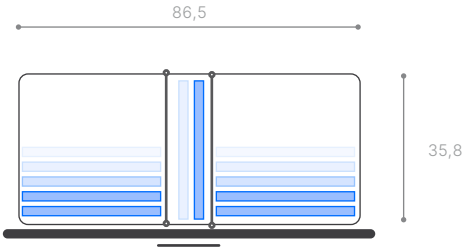

1000 mm


DIVIDER


FOLDER
L.347 H.244 mm

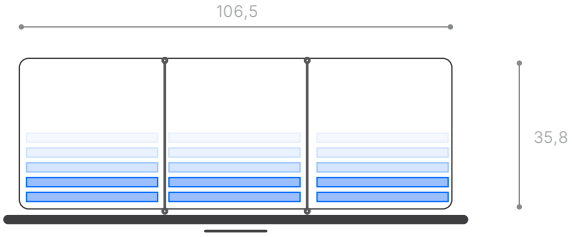

1200 mm

WARDROBE - ASSEMBLED STRUCTURE



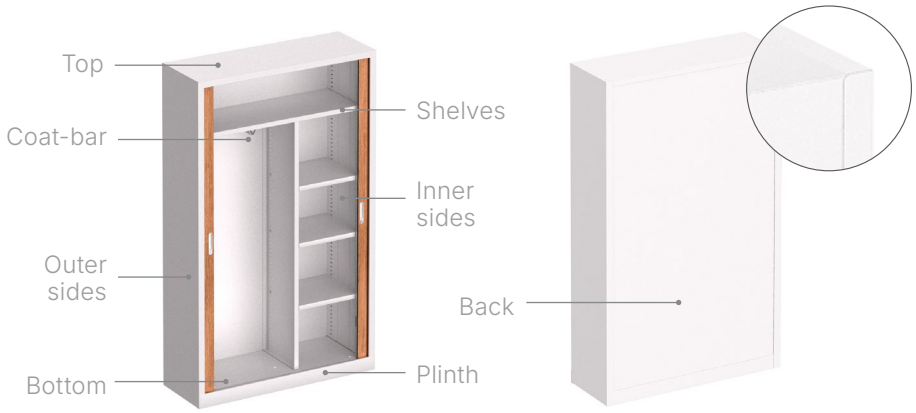

Made of cold-rolled steel sheet of 0,8 and 1,2 mm thick and quality DC01.


White RAL9016
Sand
Grey RAL 7035
Silver RAL 9006
Graphite RAL 7022
Black RAL 9005

All the elements are joined by resistance welding.

WARDROBE - ASSEMBLED STRUCTURE

Top

A4 folders can be hung on its lower folds.

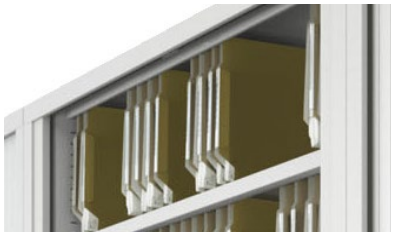

Bottom

Features two metal reinforcements that serve as supports for the levelers.

Includes 4 levelers made of steel and polyamide to ensure better floor stability.

Maximum adjustment: 1 cm.



Removable inner sides


Fastened by fittings and DIN 7981 screws.

They are drilled with a holes pattern spaced every 25 mm to position the shelves at the desired height.



This unit is delivered **assembled**.

WARDROBE - DISASSEMBLED STRUCTURE

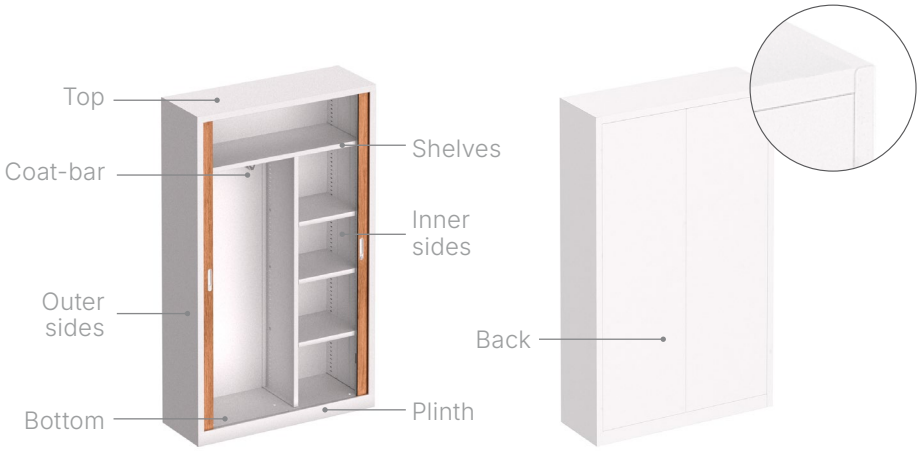

Made of cold-rolled steel sheet of 0,8 and 1,2 mm thick and quality DC01.


White RAL9016
Sand
Grey RAL 7035
Silver RAL 9006
Graphite RAL 7022
Black RAL 9005

All the elements are joined using sheet-metal screws DIN 7982.

WARDROBE - DISASSEMBLED STRUCTURE

Top

A4 folders can be hung on its lower folds.

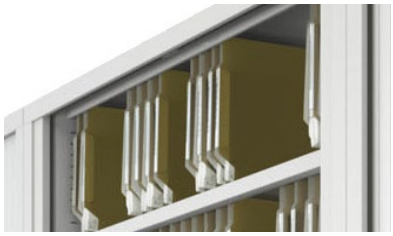

Bottom

Features two metal reinforcements that serve as supports for the levelers.

Includes 4 levelers made of steel and polyamide to ensure better floor stability.

Maximum adjustment: 1 cm.



Removable inner sides

Fastened by fittings and DIN 7981 screws.

They are drilled with a holes pattern spaced every 25 mm to position the shelves at the desired height.



WARDROBE - TAMBOUR DOORS

Made of PVC slats (trilaminate), fire-retardant class M1 - (EN 13501-1, B-s1,d0).

Finishes

White
Sand
Grey
Silver
Graphite
Black
Beech
Maple
Light acacia
Dark acacia
Oak
Dark oak
Carbon oak

Opening system

The top and bottom include silver poliamide (PA66) guides on which the slats slide.

Lock type

Hook latch lock.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



WARDROBE - TAMBOUR DOORS

Handle types

BASIC

The first slat is an aluminum metal profile.

It is supplied with the same finish as the structure.



PLUS

The first slat is an aluminum profile covered with a PVC trim featuring a magnetic closure.

It is supplied with the same finish as the tambour doors.



The handle is a PVC trim embedded in the first slat (profile) of each door.

White RAL9016

Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005

WARDROBE - HINGED DOORS

19 mm of thickness. Recoated chipboard with melamine of 120 grs/m^2 in both faces with a density of 630 ± 5 Kg/m^3.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

Finishes

White

Sand

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

Hinges

110º hinges with 91° opening and silicone soft bumpers.



WARDROBE - HINGED DOORS

Lock type

Standard **latch hook** locking system with white zinc-coated internal rods.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



Handles types

Standard: Made of aluminum painted with epoxy paint.

It is assembled to the door using M4 screws.

Dimensions: 11,5 × 2 × 3 cm



Optional: Made of aluminum painted with epoxy paint. It is assembled to the door using M4 screws.

Dimensions: 11,2 × 2,6 × 0,7 cm



White RAL9016


Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005


WARDROBE



Coat-bar

Cold-rolled bent steel sheet of 0,8 mm thick and quality DC01.

It has a “V” shape to fit into the lower folds of the metal shelves.



Metal shelves

29 mm thick, cold-rolled bent steel sheet of 0,8 mm thick and quality DC01.


They are assembled on the sides of the cabinet with 4 hooks that snap into place on the cabinet sides.




Shelves included.

Inner measurements


WARDROBE WITH TAMBOUR DOORS





WARDROBE WITH HINGED DOORS





SHELVES

Metal shelves

29 mm thick, cold-rolled bent steel sheet of 0,8 mm thick and quality DC01.

They are assembled on the sides of the cabinet with 4 hooks that snap into place on the cabinet sides.




White RAL9016 | Sand | Grey RAL 7035

Silver RAL 9006 | Graphite RAL 7022 | Black RAL 9005

A4 folders can be hung on its lower folds.




Suggested shelves

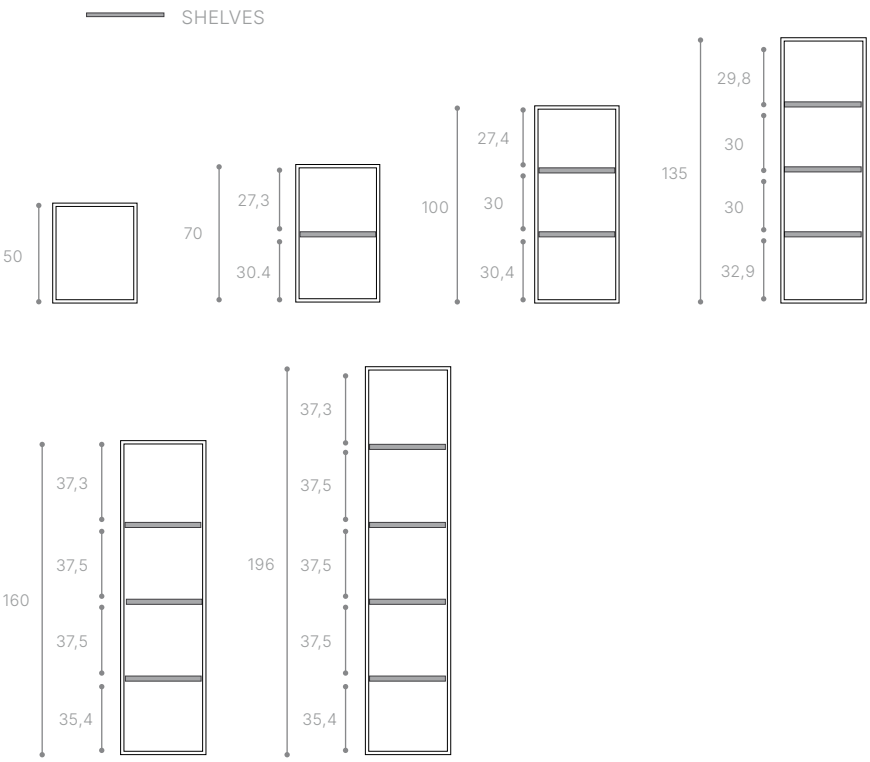

SHELVES

Suggested folders

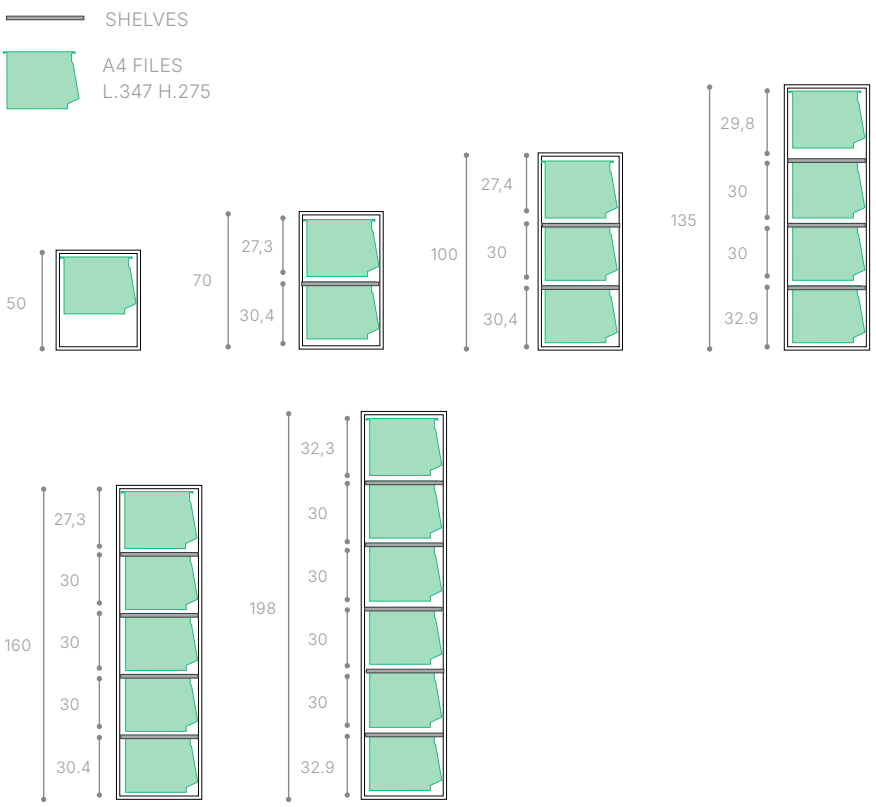

Maximum load capacity for metal shelves

In accordance with standards UNE-EN 14073-2:2005 (*Mobiliario de oficina. Unidades de almacenamiento. Requisitos de seguridad*) and UNE-EN 14074:2005 (*Métodos de ensayo para estabilidad y resistencia*), the shelves must be able to support a uniformly distributed load of 1.5 kg per square decimetre (kg/dm²) of usable surface.

CABINET WIDTH (cm)	SHELF DIMENSIONS (dm)	SURFACE (dm²)	MAXIMUM LOAD (Kg)
120	10,34 × 3,56	36,80	**55,20**
100	8,34 × 3,56	29,70	**44,55**
80	6,34 × 3,56	22,56	**33,84**

MELAMINE MULTI-TOP


19 or 25 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 ± 5 kg/m³.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

Finishes


White
Sand
Grey
Silver
Graphite
Black
Beech
Maple
Light acacia
Dark acacia
Oak
Dark oak
Walnut
Carbon oak
Stone
Marble

For tambour doors cabinets





For the rest of the cabinets





Up to 3 cabinets of the same width (80 and 100 cm) can be joined together. For cabinets 120 cm wide, up to 2 cabinets can be joined.

Multi-tops are fixed on top of the cabinets using double-sided adhesive tape.

TELESCOPIC FILE

Metal frame made of 1.5 mm thick steel sheet and finished with black epoxy paint.

The telescopic rails are full-extension with steel ball bearings **supporting up to 40 kg.**


FILE HOLDER:

Made of Ø 4 mm steel, painted black.

They prevent the folders from sticking out.




Maximum distribution for telescopic files

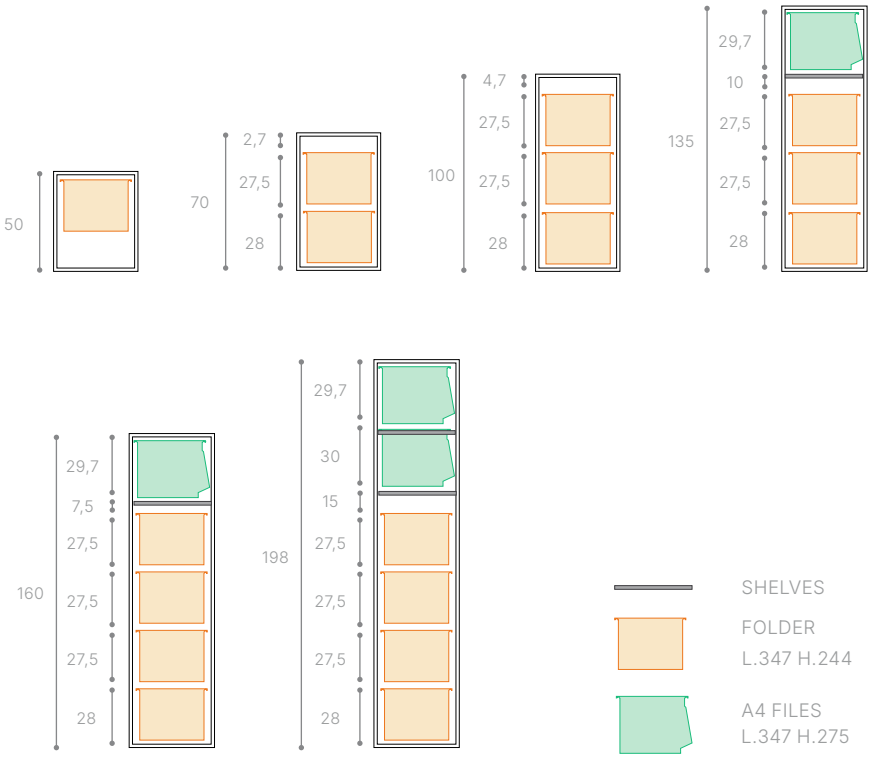

MEASUREMENTS (cm)


Cabinets & shelves

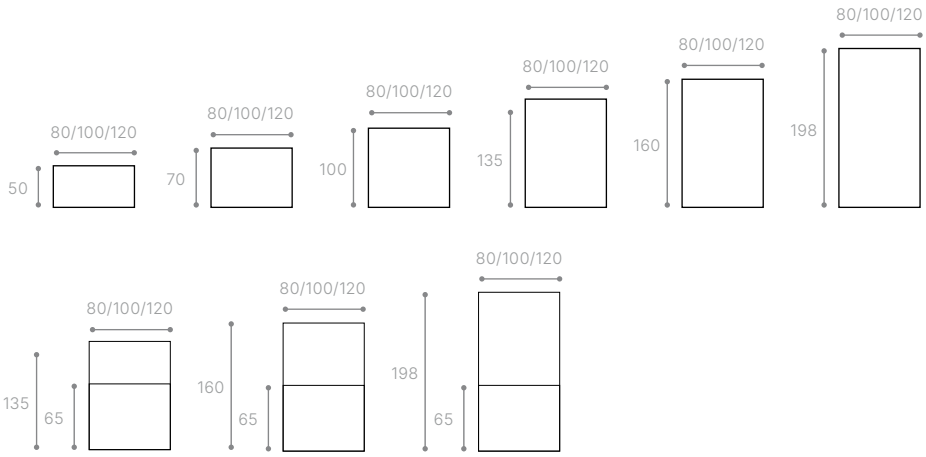

⚠ **WARDROBE CABINET** (tambour and hinged doors): only available in height 160 cm and 198 cm.

CABINET WITH FILES: maximum height 135 cm.

CABINET WITH LOW MELAMINE DOORS and LOW FILES: minimum height 135 cm.

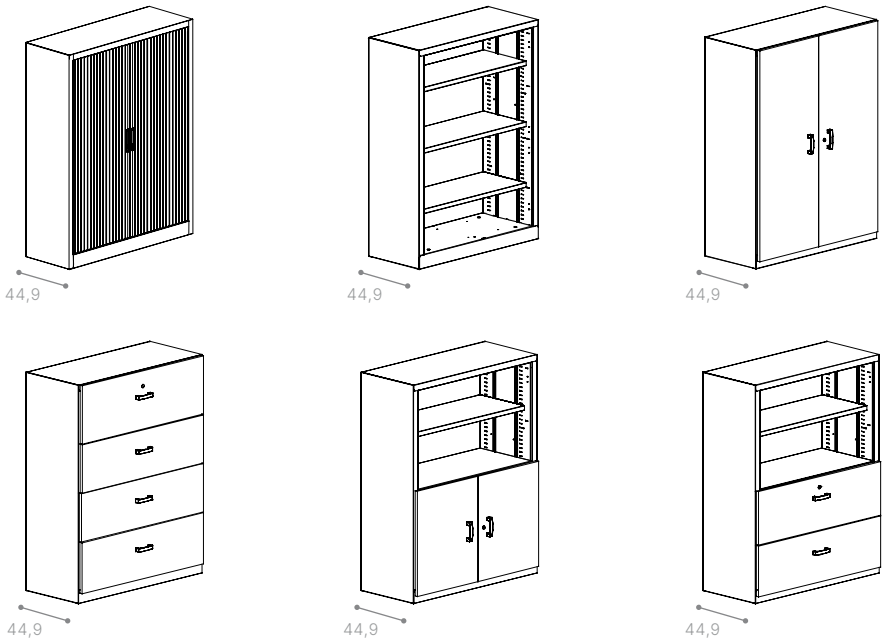

VERSIONS


Basic tambour doors



Plus tambour doors



Shelves

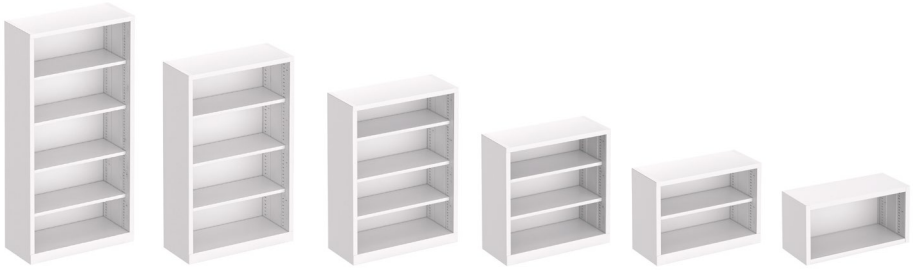

Melamine hinged doors



VERSIONS

Files



Shelves + low melamine doors



Shelves + files



Wardrobe





CERTIFICATES AND CARE INSTRUCTIONS

Certificates

UNE-EN 14073-2:05
UNE-EN 14073-3:05
UNE-EN 14074:05

Care instructions

Clean the credenza and its components with a soft cloth and neutral detergent.

Then dry with a clean, dry cloth.

ECODESIGN

Recyclabilty and toxic materials

This furniture does not contain any toxic material and its components are recyclable.

For more information, please contact export department.



SPECIFICATIONS

- FIXED WITHOUT TOP
- FIXED WITH TOP
- MOBILE
- DRAWER TYPES


COMPLEMENTS

- DIVIDERS
- PENCIL TRAY

DOCUMENTATION

- MEASUREMENTS
- VERSIONS
- CERTIFICATES AND CARE INSTRUCTIONS
- ECODESIGN

FIXED PEDESTALS WITHOUT TOP

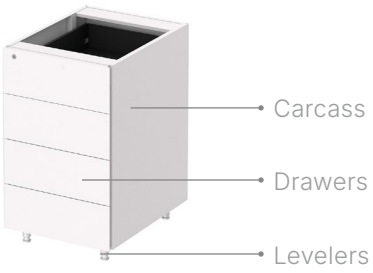

Carcass

Carcass composed of side panels, back panel, and upper and lower reinforcements.

Cold-rolled steel sheet of 0,8 mm thick and quality DC01.

White RAL9016

Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005

All the elements are joined by resistance welding and MIG welding spots.


The bottom includes 4 black PVC glides with Ø 30 mm adjustable levelers to ensure better floor stability.

Maximum adjustment: 2 cm.



This unit is delivered **assembled**.

FIXED PEDESTALS WITH TOP

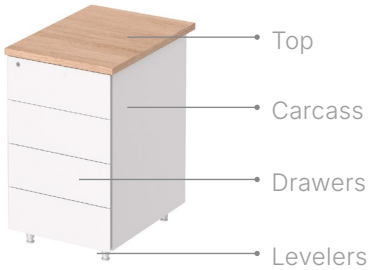

Carcass

Carcass composed of side panels, back panel, and upper and lower reinforcements.

Cold-rolled steel sheet of 0,8 mm thick and quality DC01.

White RAL9016

Sand

Silver RAL 9006

Graphite RAL 7022

Black RAL 9005

All the elements are joined by resistance welding and MIG welding spots.

FIXED PEDESTALS WITH TOP

Top

25 mm of thickness. Recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 ± 5 kg/m³.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

White

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

The top is screwed to the pedestal.

The bottom includes 4 black PVC glides with Ø 30 mm adjustable levelers to ensure better floor stability.


Maximum adjustment: 2 cm.



This unit is delivered **assembled**.

MOBILE PEDESTALS

Carcass

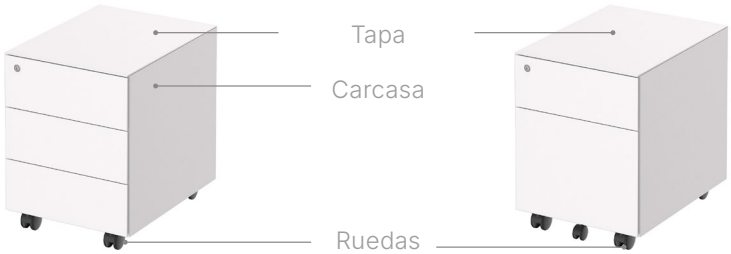

Carcass composed of side panels, back panel, top and bottom.

Cold-rolled steel sheet of 0,8 mm thick and quality DC01.

White
RAL9016

Sand

Silver
RAL 9006

Graphite
RAL 7022

Black
RAL 9005

All the elements are joined by resistance welding and MIG welding spots.

Casters


Black polypropylene casters Ø 50 mm with polyamide tread and a M10 pin.

The front casters have brakes.



For pedestals with 3 drawers: 4 casters.

For pedestals with 1 drawer + 1 file: 5 casters. The fifth caster (Ø 30 mm) is mounted under the file drawer to provide greater stability and to better support the weight applied to the guides.



This unit is delivered **assembled**.

DRAWERS

Drawer fronts


Made of cold-rolled steel sheet of 0,8 mm thick and quality DC01.

White RAL 9016 | Silver RAL 9006 | Graphite RAL 7022 | Black RAL 9005

The fronts are screwed to the drawers.

Inner drawer and guides

METAL DRAWER:
- Inner drawer made of black steel sheet 0.8 mm thick, perforated for divider anchoring.
- Visible telescopic steel guides with ball-bearings.
- Total extension for the drawers with anti-tilt system.
- Total extension for the file drawer with anti-tilt system.
- Simultaneous locking mechanism in all drawers.
- Drawer load capacity: 35 Kg.

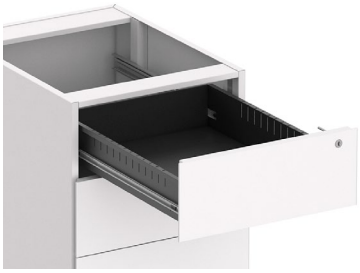

File drawer

The filing drawer includes a black **metal frame** made of cold-rolled steel sheet of 0,8 mm thick and quality DC01.
Suitable for hanging folders in DIN A4, folder files, or extended “Folio” format.
Size adjustable using the movable rods.




Lock type

Central locking located at the front of the top drawer.
Mounted on the inside of the right side panel.
Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



DIVIDERS

Of cold-rolled steel sheet of 2 mm thick and quality DC01.

They are inserted, without fittings, into the interior drawers perforations.



PENCIL TRAY

Made of cold-rolled bent steel sheet of 1 mm thick and quality DC01.

Dimensions: 37,5 × 11,5 × 2 cm



⚠ Included in all pedestals.


MEASUREMENTS (cm)

Drawer pull-out

INNER MEASUREMENTS


FIXED PEDESTALS

DRAWERS
Total extension



35×49 H.9 cm


FILE DRAWERS
Total extension



35×49 H.24,5 cm


MOBILE PEDESTALS

DRAWERS
Total extension



35×49 H.9 cm


FILE DRAWERS
Total extension




44,5×38 H.24,5 cm

MEASUREMENTS (cm)


Fixed pedestals without top

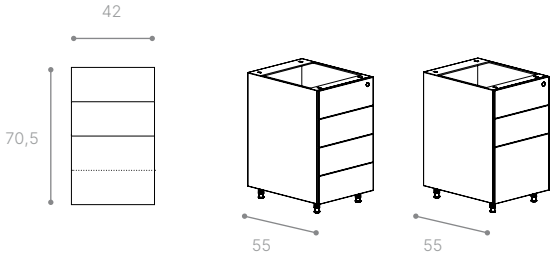

Fixed pedestals with top

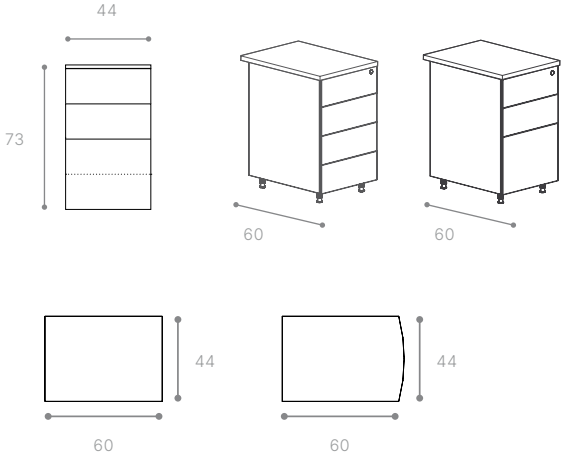

Mobile pedestals

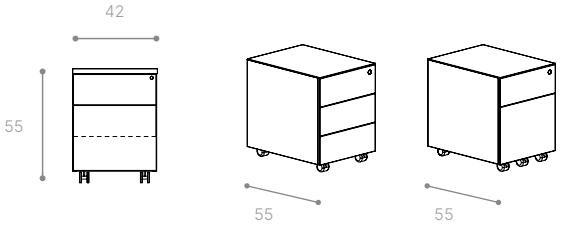

VERSIONS

Fixed pedestals without top



Fixed pedestals with top



Mobile pedestals



CERTIFICATES AND CARE INSTRUCTIONS

Certificates

UNE-EN 14073-2:05
UNE-EN 14073-3:05
UNE-EN 14074:05

Care instructions

Clean the pedestal and its components with a soft cloth and neutral detergent.

Then dry with a clean, dry cloth.

ECODESIGN

Recyclabilty and toxic materials

This furniture does not contain any toxic material and its components are recyclable.

For more information, please contact export department.



SPECIFICATIONS

- CARCASS
- SLIDING DOOR
- DRAWER TYPES

COMPLEMENTS


- DIVIDERS
- PENCIL TRAY

DOCUMENTATION

- MEASUREMENTS
- VERSIONS
- CERTIFICATES AND CARE INSTRUCTIONS
- ECODESIGN

CARCASS



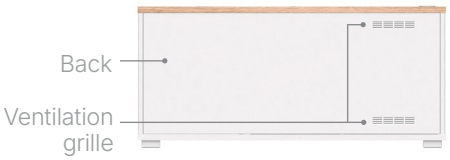

Melamine

Is built with recoated chipboard with melamine of 120 grs/m² in both faces with a density of 630 ± 5 Kg/m³.

White Silver Black






METAL ENCLOSURE

MELAMINE CREDENZA

Metal


METAL ENCLOSURE: consists of one metal back panel and two metal side panels, made of coldrolled steel sheet of 1,2 mm thick and quality DC01.

White RAL 9016 Silver RAL 9006 Black RAL 9005

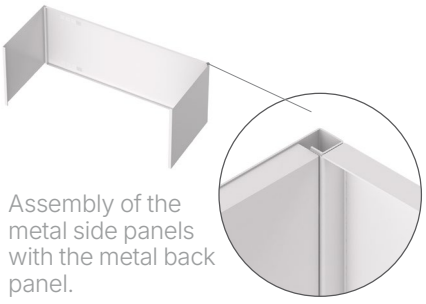

Assembly of the metal side panels with the metal back panel.

The metal back panel includes ventilation perforations.



Assembly of the melamine side panel to the metal enclosure.

CARCASS

Top

Of 25 mm thick with ABS edges of 0,8 mm fixed with melted glue and beveled.

Front edge is of 2 mm fixed with melted glue and rounded in shape.

White

Sand

Grey

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

The top includes a cable grommet Ø 6 cm and a **round plastic cover** in silver, white, or black finish.

Bottom

Of 25 mm thick with ABS edges of 0,8 mm fixed with melted glue and beveled.

Front edge is of 2 mm fixed with melted glue and rounded in shape.

The bottom includes **4 glides** (silver, white, or black) with an adjustable leveler for better floor stability, with a maximum adjustment of 1 cm.

CARCASS

Inner and outer sides

Of 19 mm thick with ABS edges of 0,8 mm fixed with melted glue and beveled.

Front edge is of 2 mm fixed with melted glue and rounded in shape.

Two adjustable shelves

Of 19 mm thick with ABS front edge of 2 mm fixed with melted glue and rounded in shape. The remaining sides are without edging.

Fixed to the inner sides of the credenza with 4 cylindrical pin supports.

White Silver Black

The carcass is flush and fastened with screws.

This unit is delivered **assembled**.

SLIDING DOOR







Melamine

19 mm of thickness. Recoated chipboard with melamine of 120 grs/m^2 in both faces with a density of 630 ± 5 Kg/m^3.

ABS edges all around with a bevel of 0,8 and 2 mm. Edges are fixed with melted glue rounded in shape and beveled.

White

Sand

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

SLIDING DOOR

Opening system

Roller guide system at the top and bottom.

The doors slide on a silver PVC aluminum guide.

Adjustable from the inside.



Handles types

Standard: Made of aluminum painted with epoxy paint.

It is assembled to the door using M4 screws.

Dimensions: 11,5 × 2 × 3 cm



Optional: Made of aluminum painted with epoxy paint. It is assembled to the door using M4 screws.

Dimensions: 11,2 × 2,6 × 0,7 cm



White
RAL9016

Sand

Silver
RAL 9006

Black
RAL 9005

DRAWER TYPES



CREDENZA WITH 3 DRAWERS



CREDENZA WITH 1 DRAWER + 1 FILE

Drawer fronts

Of 19 mm of thickness. Recoated chipboard with melamine of 120 grs/m^2 in both faces with a density of 630 ± 5 Kg/m^3.

ABS edges all around with a bevel of 0,8 mm. Edges are fixed with melted glue and beveled.

White

Sand

Grey

Silver

Graphite

Black

Beech

Maple

Light acacia

Dark acacia

Oak

Dark oak

Carbon oak

DRAWER TYPES

Inner drawer and guides

TOP RANGE:

- Inner drawer made of black steel sheet 0.8 mm thick, perforated for divider anchoring.

- Concealed telescopic steel guides with ball-bearings.

- Partial extension (80%) for the drawers with anti-tilt system.

- Total extension for the file drawer with anti-tilt system.

- Simultaneous locking mechanism in all drawers.

- Drawer load capacity: 12 Kg.



BASIC RANGE:

- Inner drawer made of black steel sheet 0.8 mm thick, perforated for divider anchoring.

- Visible telescopic steel guides with ball-bearings.

- Partial extension (80%) for the drawers with anti-tilt system.

- Partial extension (80%) or the file drawer with anti-tilt system.

- Simultaneous locking mechanism in all drawers.

- Drawer load capacity: 12 Kg.



WOOD RANGE:

- Cajón interior con prefabricado de melamina de 12 mm y fondo de 4 mm con un encaste para colocar las guías.

- Visible telescopic steel guides with ball-bearings.

- Partial extension (80%) for the drawers.

- Total extension for the file drawer.

- Simultaneous locking mechanism in all drawers.

- Drawer load capacity: 12 Kg.



DRAWER TYPES

File drawer

The filing drawer includes a black **metal frame** made from Ø 6 mm rod.

Suitable for hanging folders in DIN A4, folder files, or extended “Folio” format.

Size adjustable using the movable rods.



Lock type


Central locking located at the front of the top drawer.

Mounted on the inside of the right side panel.

Includes two break-resistant articulated and foldable gray keys.

Optional: master key or identical keys in silver finish (RAL 9006).

Cylinders are replaceable in case of breakage.



Handles types

Standard: Made of aluminum painted with epoxy paint.

It is assembled to the door using M4 screws.

Dimensions: 11,5 × 2 × 3 cm



Optional: Made of aluminum painted with epoxy paint. It is assembled to the door using M4 screws.

Dimensions: 11,2 × 2,6 × 0,7 cm



White
RAL9016

Sand

Silver
RAL 9006


Black
RAL 9005

DIVIDERS


Black PVC.

They are inserted, without fittings, into the interior perforations of top and basic range drawers.


DIN A-4




DIN A-5



DIN A-6



DIN A-7



PENCIL TRAY


Black PVC.




MEASUREMENTS (cm)


Credenzas

EXTERNAL MEASUREMENTS



INNER MEASUREMENTS

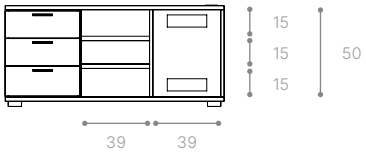



VERSIONS

3 drawers



RIGHT



LEFT

1 drawer + 1 file



RIGHT



LEFT

CERTIFICATES AND CARE INSTRUCTIONS

Certificates

UNE-EN 14073-2:05
UNE-EN 14073-3:05
UNE-EN 14074:05

Care instructions

Clean the credenza and its components with a soft cloth and neutral detergent.

Then dry with a clean, dry cloth.

ECODESIGN

Recyclabilty and toxic materials

This furniture does not contain any toxic material and its components are recyclable.

For more information, please contact export department.