MOBEL LINEA

D-8.3.7

rol
coffee tables

Specs guide

rol
coffee tables

Specs guide

D-8.3.7



SPECIFICATIONS

DESKTOPS

FRAME

DOCUMENTATION

MEASUREMENTS

VERSIONS

CARE INSTRUCTIONS

DESKTOPS

Melamine top

25 mm of thickness. Recoated chipboard with melamine of 120 grs/m^2 in both faces with a density of 630 ± 5 kg/m^3.

ABS edges all around with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

HPL (High Pressure Laminate) top

25 mm of thickness. Recoated chipboard with decorative plastic laminate of 0,8 mm of thickness with a density of 630 ± 5 kg/m^3.

ABS edges all around the top with a bevel of 2 mm. Edges are fixed with melted glue and rounded in shape.

Finishes



Tops are fixed to the structure of the table with DIN 7991 M6 × 16 white-zinc screws.


Structure has 4 fixing drillings for the top.

FRAME - PEDESTAL

Cross reinforcement beams

4 rectangular steel tubes of 30 × 30 × 1,5 mm.

Four fixing drillings for the top.



Reinforcements are fitted into columns notches and fixed with M8 washers and DIN 912 M8 × 16 black screws.

Central column

Steel round column of Ø114 × 2mm.


With 4 notches for the reinforcements.

Base is joined with the central column with DIN 7991 M8 × 25 white-zinc screws.

Base

5 mm round steel sheet of 680 × 680 or 400 × 400 mm.

The base has a non-slip ribbon for more stability.



Finishes

White RAL 9016

Sand

Silver RAL 9006

Graphite RAL 7022


Black RAL 9005

Brass

Bronze

Corten steel

MEASUREMENTS (cm)

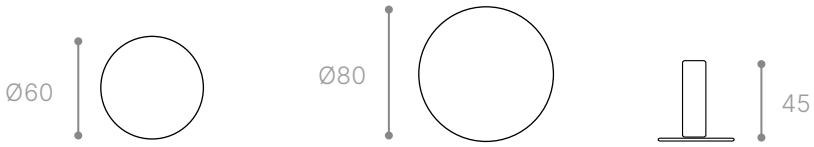

VERSIONS



CARE INSTRUCTIONS

Clean the table and its components with a soft cloth and neutral detergent.

Then dry with a clean, dry cloth.