MOBEL LINEA

D-8.3.7

rol

Specs guide



SPECIFICATIONS

DESKTOPS

FRAME

DOCUMENTATION

MEASUREMENTS

DESKTOPS

Melamine top

25 mm of thickness. Recoated chipboard with melamine of 120 grs/m^2 in both faces with a density of 600 Kg/m^3 ± 5 %.
ABS edges all around the top with a bevel of 2 mm.

Edges are fixed with melted glue and rounded in shape.

HPL (High Pressure Laminate) top

25 mm of thickness. Recoated chipboard with decorative plastic laminate of 0,8 mm of thickness with a density of 600 Kg/m^3 ± 5 %. ABS edges all around the top with a bevel of 2 mm.

Edges are fixed with melted glue and rounded in shape.

Finishes



Tops are fixed to the structure of the table with DIN 7991 M6 × 16 white-zinc screws.


Structure has 4 fixing drillings for the top.

FRAME


Base

5 mm square or round steel sheet of 680 × 680 mm.

The base has a non-slip ribbon for more stability.



Square base




Round base

Central column

Steel round column of Ø114 × 2 with 4 notches for the reinforcements.


Base is joined with the central column with DIN 7991 M8 × 25 white-zinc screws.



Cross reinforcement beams

4 rectangular steel tubes of 30 × 30 × 1,5 mm.

Reinforcements are fitted into columns notches and fixed with M8 washers and DIN 912 M8 × 16 black screws.



Finishes

White
RAL 9016

Sand

Silver
RAL 9006


Graphite
RAL 7022

Black
RAL 9005

Brass


Bronze

Corten
steel



MEASUREMENTS (cm)

Square table

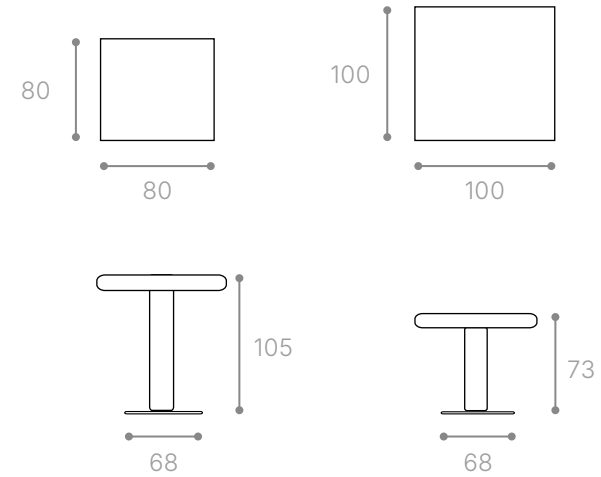

Round table

